

## **ATF DEXRON III**

### **AUTOMATIC TRANSMISSION FLUID – DEX III 10W**

Quality automatic transmission fluid based on **High Viscosity Index base oils** and carefully selected additives for shudder free and smooth torque performance.


**ATF Automatic DEX-III** is blended to meet the stringent requirements of leading European, US and Asia automotive transmission manufacturers. It is fully compatible with earlier **Dexron** and **Mercon** type fluids and maybe used for topping up or completely replacing.

#### **Performance Features**

- Friction modified - Formulated to provide consistent, reliable, and smooth and trouble-free operation of automotive transmission systems.
- High oxidation resistance - **ATF DEXIII** is resistant to oil degradation and assists with keeping automatic transmissions clean.
- Good shear-stability - A special '**VI**' improver minimises the changes in viscosity with operating temperature.
- Dependable anti-wear and gear protection - Long component life.
- Low temperature performance - Good oil fluidity at low temperatures

#### **Applications**

- **Pennarol ATF DEX-III** is manufactured to the last generation Dexron III-H ATF performance.
- It is recommended for many transmissions used in **General Motors cars**, Holden, Isuzu, Opel and Hydramatic transmissions.
- It is also suitable many earlier model **Japanese vehicles** where Dexron type fluids are recommended.
- It is recommended for transmissions where Dexron and Dexron II fluids are specified **except Mercedes-Benz, ZF, BMW, Voith & Renk**.
- It is recommended for transmissions where **Dexron and Dexron II** fluids are specified
- It may be used in power steering systems for many of cars, light commercial vehicles and tractors except where specialist fluids are recommended.

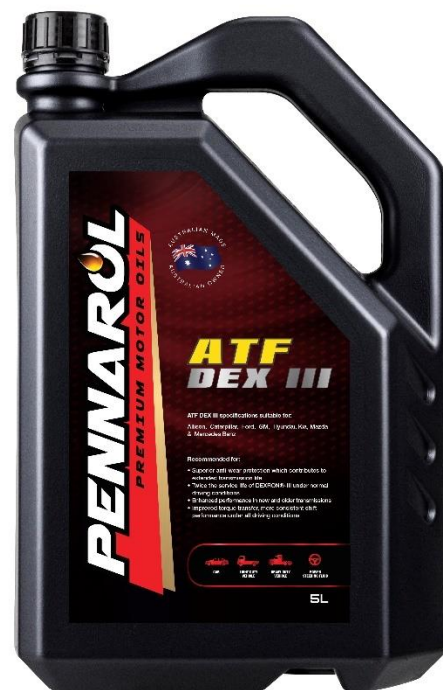

# ATF DEXRON III

## AUTOMATIC TRANSMISSION FLUID – DEX III 10W

- **Pennarol ATF DEXRON III is also recommended for the following vehicles:**

- Toyota Most models prior to 2002
- MAZDA Most models up to 2002.
- NISSAN Most models up to 2004.
- SUBARU All except 5-speed, prior to 2008
- HOLDEN All models up to 2006.

### Specifications

- Society of Automotive Engineers (SAE) 10W
- DEX IIIH – 2005 and earlier models
- TASA – GM 2 Speed Transmission
- DEX IIIG – 1994 and earlier models
- DEX IIID - 1973 and earlier models
- Volvo 37325, Volvo 37335
- Allison C-4
- ZF TE-ML 05L
- ZF TE-ML 09L
- ZF-TE-ML 21L
- TES-389B
- Auto Trak II – GM Transfer Case
- Ford XL-12 Ford Transfer Case
- Approved under previous versions

\*Check owners' manual before use.

### Typical Data

Test	Result
Viscosity @ 40°C	36.65cSt
Viscosity @ 100°C	7.76cSt
Viscosity Index	179
Specific Gravity	0.845
<b>Product Code- Pack Size</b>	<b>0170. 05/20/205</b>

**Note:** Pennarol ATF DEX-III transmission oil may be unsuitable for use in some transmissions, always consult owners' manual if in doubt

### Storage

All packages should be stored under cover to avoid the possible ingress of water and the obliteration of drum markings. Products should not be stored above 60°C