

# FULL SYNTHETIC SAE 0W-20

## API SN PLUS, ILSAC GF-5 PASSENGER CAR PETROL OIL


**Pennarol 0W-20** is an advanced **Full Synthetic** engine oil designed to help deliver outstanding engine protection and enhanced fuel economy.

**Pennarol 0W-20** meets or exceeds the requirements of various vehicle manufacturers and industry standards and outperforms conventional oils.

**Pennarol 0W-20** is recommended for SAE 0W-20 and 5W-20 applications.

**Pennarol 0W-20** is formulated with a proprietary blend of performance synthetic base stocks fortified with a precisely balanced component additive system to meet **SN/SN Plus GF-5** Resource Conserving fuel efficiency. The low viscosity, advanced full synthetic formulation helps to increase engine efficiency and improve fuel economy.

**Pennarol 0W-20** provides the high-temperature protection of higher viscosity oils while offering fuel economy.

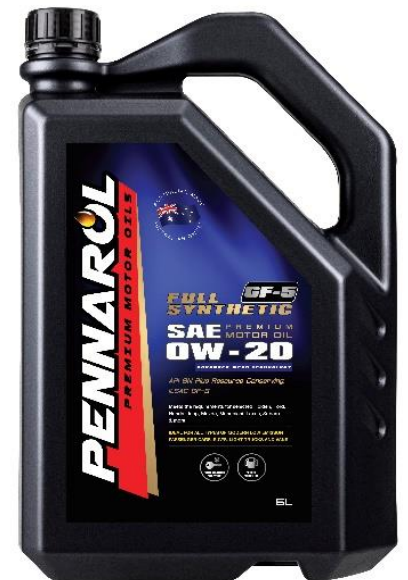

### Performance Features

- Outstanding thermal and oxidation stability
- Protects against wear and load at each of the critical stages of stop-start and highway driving
- Low viscosity, advanced full synthetic formula for fuel efficiency operation.

# FULL SYNTHETIC SAE 0W-20

**API SN PLUS, ILSAC GF-5 PASSENGER CAR PETROL OIL**

## Applications

**Pennarol 0W-20** is suitable for use in automotive petrol engines including those with hybrid technology where the manufacturer recommends an **API SN, ILSAC GF-5** or earlier specification 0W-20 lubricant.

## Industry Specifications

- API SN/SN Plus (Resource Conserving)
- ILSAC GF5
- Ford WSS-M2C947-A / B1
- General Motors GM 6094M
- Dexos 1

\*Check owners' manual before use.

## Typical Data

Test	Result
Viscosity @ 40°C	45.17cSt
Viscosity @ 100°C	8.47cSt
Viscosity Index	174
Specific Gravity	0.846
<b>Product Code -Pack Sizes</b>	<b>0919/05/20/205</b>

**Note:** Pennarol Full Synthetic SAE 0W-20 engine oil may be unsuitable for use in some engines, always consult owners' manual if in doubt

## STORAGE

All packages should be stored under cover to avoid the possible ingress of water and the obliteration of drum markings. Products should not be stored above 60°C.